



Microalgae Biorefinery - Industrial Symbiosis

Van Wagenen, Jonathan; De Francisci, Davide; Valverde Perez, Borja; Holdt, Susan Løvstad; Podevin, Mike; Smets, Barth F.; Plósz, Benedek G.; Møller, Per; Angelidaki, Irini

Publication date:
2013

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Van Wagenen, J., De Francisci, D., Valverde Perez, B., Holdt, S. L., Podevin, M., Smets, B. F., Plósz, B. G., Møller, P., & Angelidaki, I. (2013). *Microalgae Biorefinery - Industrial Symbiosis*. Poster session presented at Copenhagen Bioscience Conference: Cell Factories and Biosustainability, Denmark.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Microalgae Biorefinery - Industrial Symbiosis

Jon Van Wagenen, Davide De Francisci, Borja Valverde-Pérez, Susan Løvstad Holdt, Michael Podevin, Barth F. Smets, Benedek G. Plósz, Per Møller¹, Irini Angelidaki

*jovw@env.dtu.dk DTU Environment, Department of Environmental Engineering, Technical University of Denmark, Miljøvej, Building 113, 2800 Kgs. Lyngby, DENMARK
1: per.moller@kalundborg.dk Kalundborg Kommune, Development – Cluster Biofuels Denmark, Hareskovvej 14-16, 4400 Kalundborg, DENMARK



Integration of processes to allow residual heat, nutrients and value products to be reused

Bioextraction technology in a symbiotic industrial wastewater treatment concept creating added value

Utilization of industrial wastewaters

Kalundborg, Denmark has been recognized for developing the world's first working industrial symbiosis. In this system wastes or residuals from one business become the raw material for another business. In the last year, a collaboration between DTU and Cluster Biofuels Denmark has begun to investigate ways to use waste-water, heat and nutrients to support microalgae cultivation and high-value product extraction. There are three major components of this project: development of screening methods to identify promising species of microalgae for growth on waste- nutrients from various industries; creation of a waste-water infrastructure that makes an effluent more suited to growth of green algae; establishment of a pilot photobioreactor at the municipal wastewater treatment facility.

Screening and lab-scale cultivation




Microplates illuminated from below can be used to measure exponential growth rates in thin cultures (left), while photobioreactors (right) are used to measure actual reactor performance.

When cultivating microalgae, it can often be difficult to translate results obtained at the lab scale to the industrial scale. For this reason, we have examined a microwell plate system which was designed to screen different strains of algae on different industrial wastes. Preliminary results have shown it is possible to increase the observed period of exponential growth by measuring the fluorescence of low-density cultures in microwell plates, thereby allowing better quantification of the exponential growth rate. Work is currently underway to use a previously developed model (1) to validate that the exponential growth rates observed in the low-density microplate cultures can predict performance of high-density industrial cultures.



TRENS System: Enhanced resource recovery

Design and implementation of a cost-effective, bacteria based wastewater treatment process that can provide optimum conditions for the downstream cultivation of mixed green microalgae.

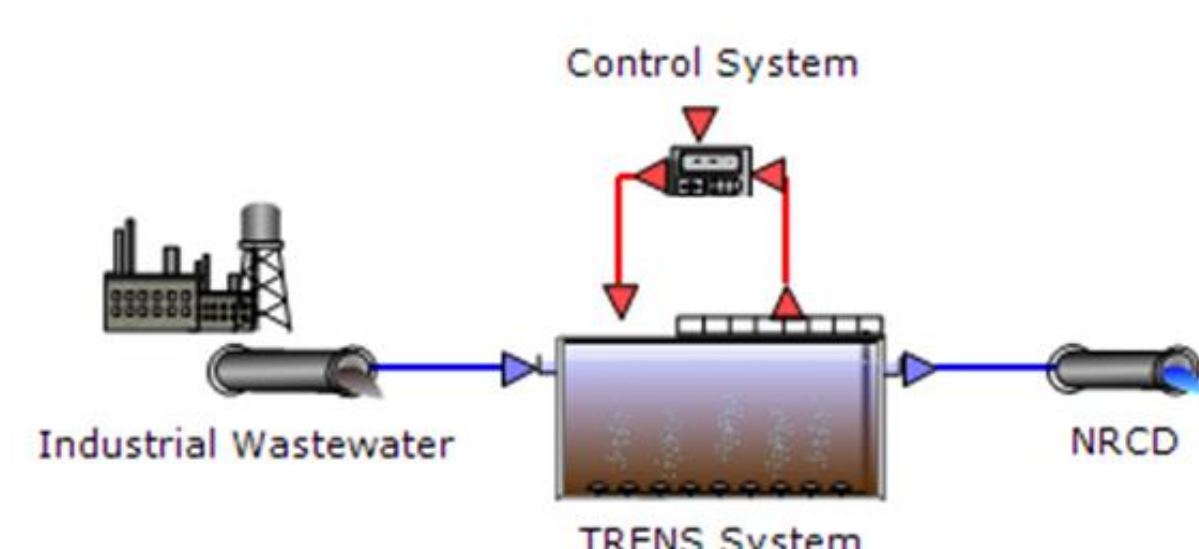

A unique process configuration and operation strategy allows TRENS (left) to transform wastewaters into media suitable for optimal algae cultivation. The algae suspension produced would be directly used as fertilizer or digested for biogas depending on seasonal requirements.

Process configurations and operation strategies for "Nutrient Rich, Carbon Depleted" (NRCD) water with:
-Balanced N : P ratio
-Optimum pH
-For more information contact Prof. Plósz at: beep@env.dtu.dk


RTD Facility

Cluster Biofuels Denmark


KALUNDBORG SYMBIOSIS



A greenhouse has been constructed (above, approximate height 9 m) at the municipal wastewater treatment facility, near a settling tank visible in the foreground. Through a water-to-water heat exchange installation, residual thermal energy in the effluent water from the settling tank is utilized as a resource to allow for a stable process temperature throughout the year. Photobioreactors supplied by Ecoduna (right) will be used for the growth of microalgae. The reactors consist of an array of flat panels, which are 6 m high and 3 cm thick. The reactors are mounted on bases which rotate to track the sun. This unique configuration allows for a high photo-active surface to volume ratio, with limited exposure to the high light intensities that can result in photoinhibition.

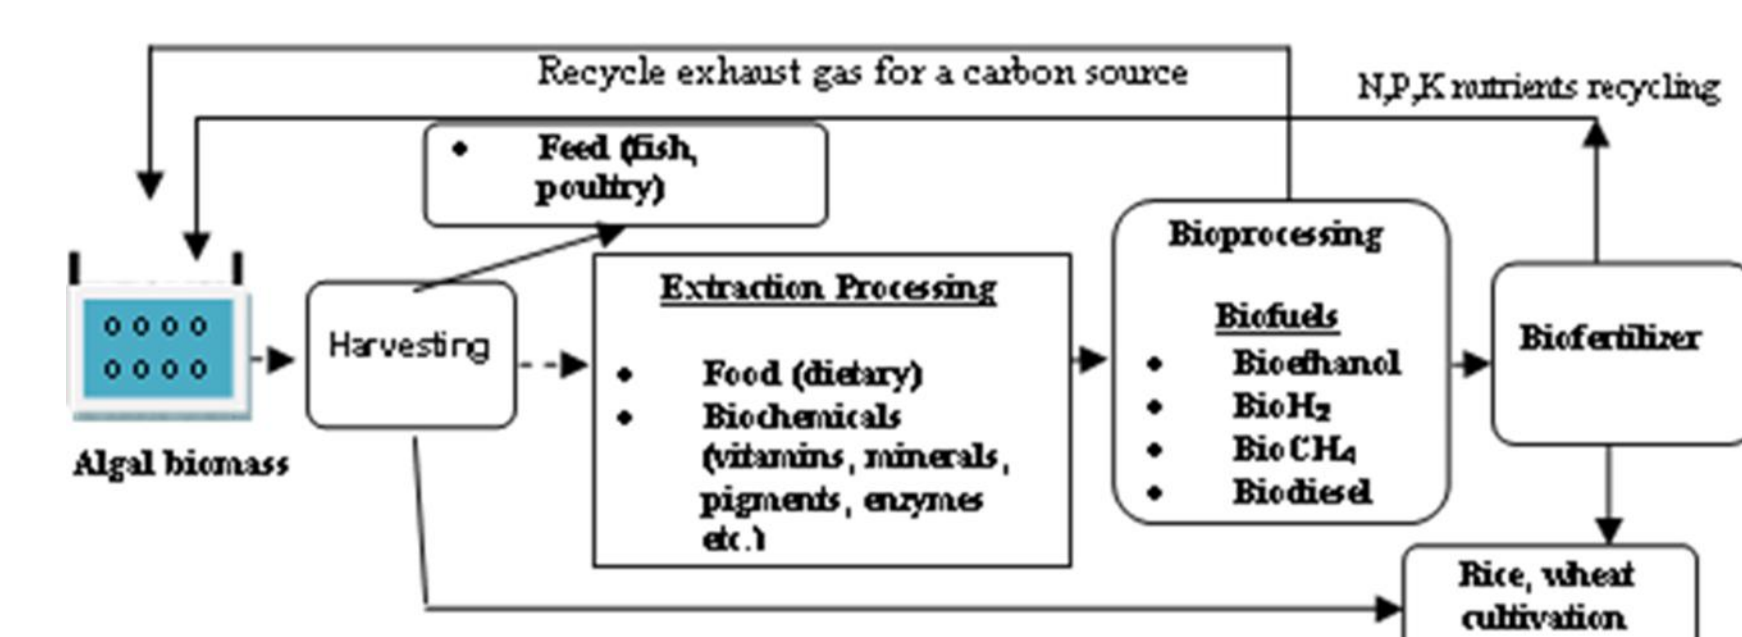

Schematic (above) demonstrating potential of algae biomass to produce multiple products in a bio-refinery. Focus will be on demonstration that high value products can be reliably produced and residuals utilized.

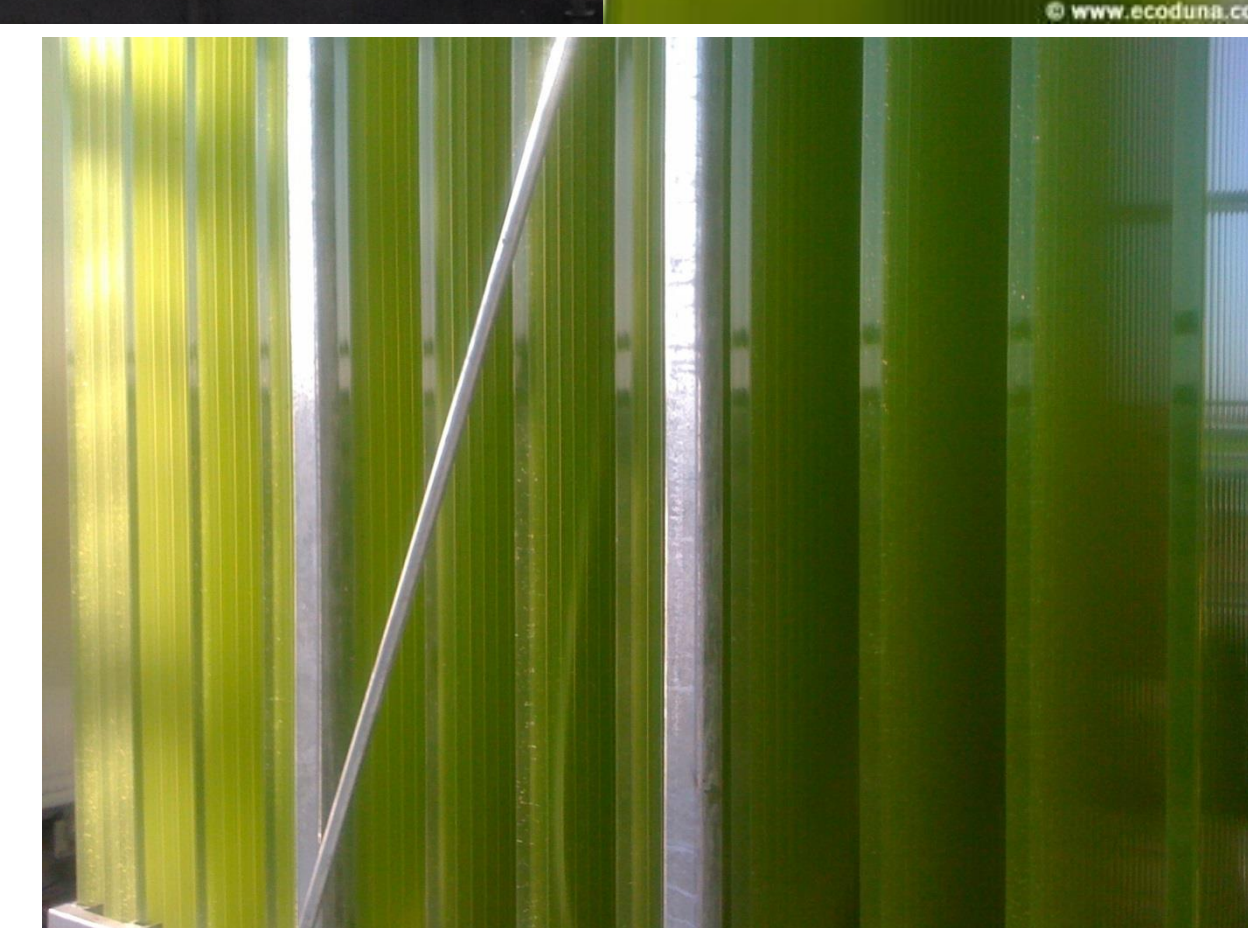

Local residue streams available


- Fresh water (at site)
 - From nearby lake (Tissø)
 - Distributed through the Industrial Symbiosis water system
- Heat from wastewater effluent (at site)
 - 16-22°C (all year)
 - Up to 3000 m³/hour
- Electricity from effluent run off (at site option)
 - 1-2 m drop through a hydro-power generator
 - Up to 3000 m³/hour
- CO₂ from biogas and fermentation off-gas (at site option)
 - From upgrading or combustion of biogas
 - Off-gas from fermentation

Acknowledgement and References



FP7-NMP-2011.3.4-1
Grant agreement n°: 280756
Start day: May 1th 2012
Duration: 48 month
Funded by the European Commission

Disclaimer notice:
The European Commission is neither responsible nor liable for any written content in this poster.

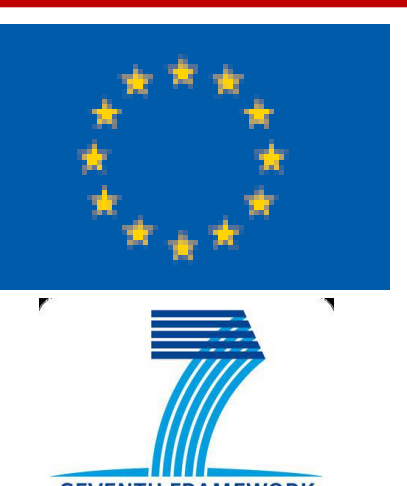

1 - M Huesemann, J Van Wagenen, T Miller, S. Hobbs, A Chavis, and B Crowe. "A Screening Model to Predict Microalgae Biomass Growth in Photobioreactors and Raceway Ponds." Biotechnology & Bioengineering. 2013

